
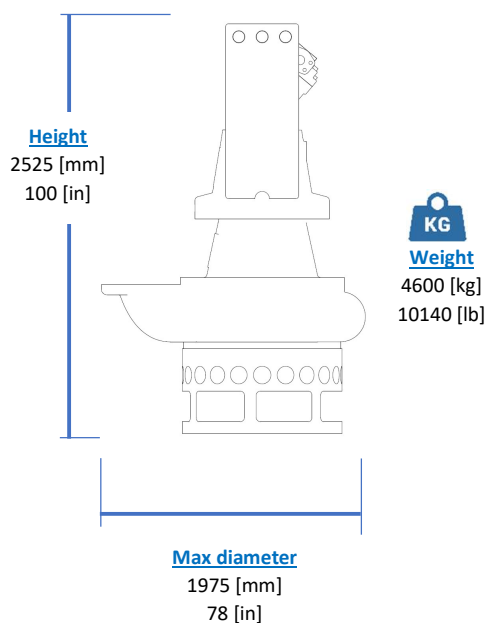


HYDRAULIC PUMP HY600HC

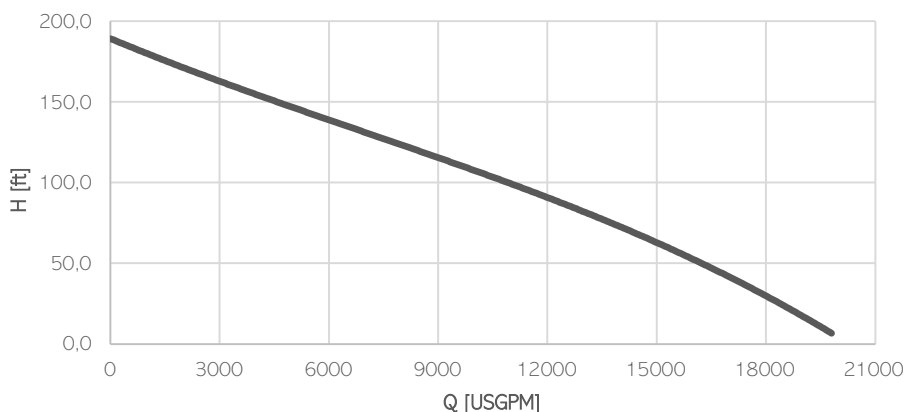

Ports

- | Service line Ports: SAE J518 1 1/4in
- | Case drain Port: DIN3852 M33x2

Operating Conditions

- | Max liquid temperature 104 °F
- | Min Submersion depth 55.1 in

Model	HY600HC
Brake Power [kW HP]	475 630
Efficiency [%]	60
RPM Max	950
Motor Displacement [cc]	1000
Oil flow rate max [l/min]	950
Nominal pressure [psi]	4.350
Max pressure [psi]	5.075
Solid handling [mm in]	120 4.7
Discharge [mm in]	450 18"

Materials

Part	Standard
Casing	Cast Iron EN-GJS500
Body	Cast Iron EN-GJS500
Wear Parts	High chrome EN-GJN-HV600 (CH6)
Minimum hardness [HB]	550
Main shaft	High tensile 39NiCrMo3
PH Range	5-10

Seals and lubricants

Version	HY600HC	MG
Motor Side	LIPS	MECHANICAL
Impeller Side	LIPS	LIPS
Oil type	EP320	ISO32