


ELECTRIC PUMP

EL150



KG
Weight
(without cable)
4500 [kg]
9920 [lb]

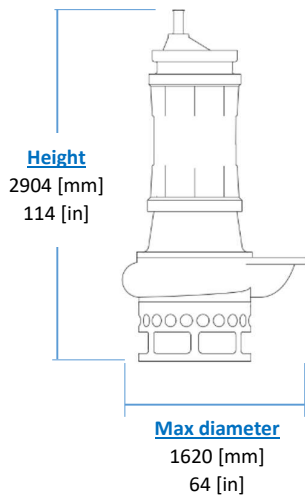

Electrical motor

Insulation class H



Cable


1 x H07RN-F 4Gxx length 60ft



Operating Conditions

- Max liquid temperature 35°C
- Min Submersion depth 2280 mm

60Hz

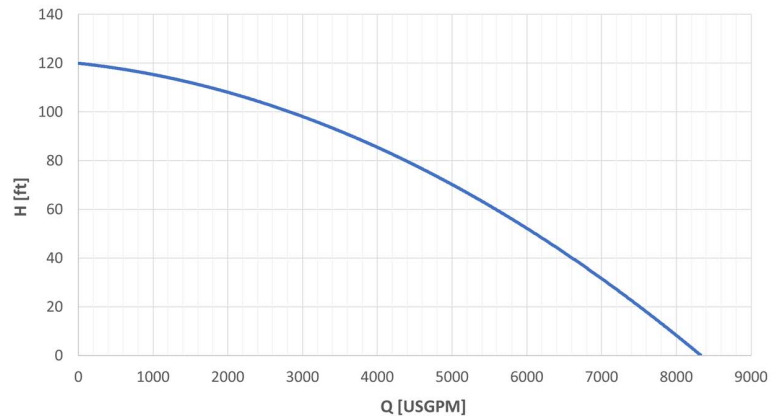

Model	EL150
Brake Power [kW HP]	110 147
Electric Power [kW HP]	120 161
Frequency [Hz]	60
Efficiency [%]	63%
Number of Poles	10
RPM	700
Voltage [V]	460
Rated Current [A]	190
Solid handling [mm in]	120 4.7
Discharge [ANSI]	250 10"

Materials

Part	Standard
Casing	Cast Iron EN-GJS500
Body	Cast Iron EN-GJS500
Wear Parts	High chrome EN-GJN-HV600 (CH6)
Minimum hardness [HB]	550
Main shaft	High tensile 39NiCrMo3
PH Range	5-10



Seals and lubricants

Version	STANDARD	MG
Motor Side	LIPS	MECHANICAL
Impeller Side	LIPS	LIPS
Oil type	EP320	ISO32